

DIGITAL NON-ROTATING SPINDLE DISK MICROMETERS (ECONOMIC TYPE)

ATTENTION: LOW PARALLELISM OF TWO MEASURING FACES

DATA OUTPUT


NON-ROTATING SPINDLE

5


- Measure root tangent length of gear
- Resolution 0.001mm/0.00005"
- Non-rotating spindle
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Supplied with setting standards
- Optional accessory: data output cable (code 7315-, 7302-, 7305-)



3594-25A




| Code | Range | Accuracy | Parallelism | L | b |
|-----------|---------------|----------|-------------|---------|--------|
| 3594-25A | 0-25mm/0-1" | ±4µm | 5µm | 43mm | 32mm |
| 3594-50A | 25-50mm/1-2" | ±4µm | 5µm | 68mm | 44.5mm |
| 3594-75A | 50-75mm/2-3" | ±5µm | 5µm | 93mm | 57mm |
| 3594-100A | 75-100mm/3-4" | ±5µm | 5µm | 118.5mm | 70mm |

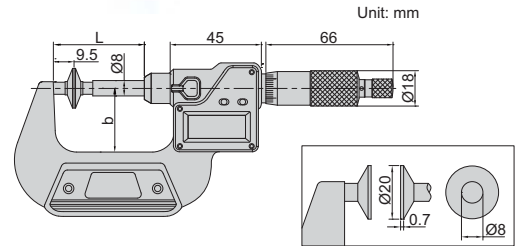


CALIPER TYPE MICROMETERS


- Graduation 0.01mm
- Non-rotating spindle
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm)

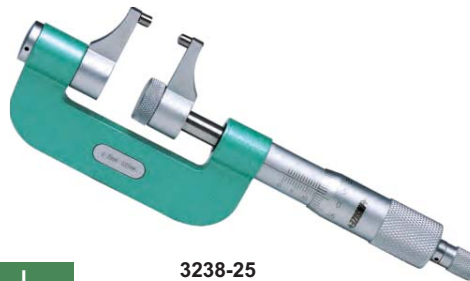

3238-25



| Code | Range | Accuracy | L |
|----------|----------|----------|-------|
| 3238-25 | 0-25mm | 5µm | 56mm |
| 3238-50 | 25-50mm | 6µm | 81mm |
| 3238-75 | 50-75mm | 7µm | 106mm |
| 3238-100 | 75-100mm | 8µm | 131mm |

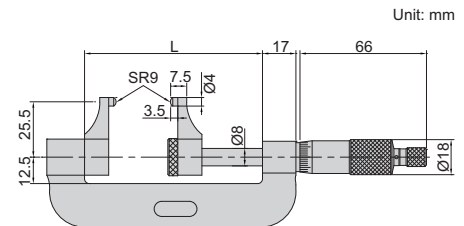


DIGITAL CALIPER TYPE MICROMETERS

DATA OUTPUT



3538-25

| Code | Range | Accuracy | L |
|----------|---------------|----------|-------|
| 3538-25 | 0-25mm/0-1" | ±5µm | 56mm |
| 3538-50 | 25-50mm/1-2" | ±6µm | 81mm |
| 3538-75 | 50-75mm/2-3" | ±7µm | 106mm |
| 3538-100 | 75-100mm/3-4" | ±8µm | 131mm |

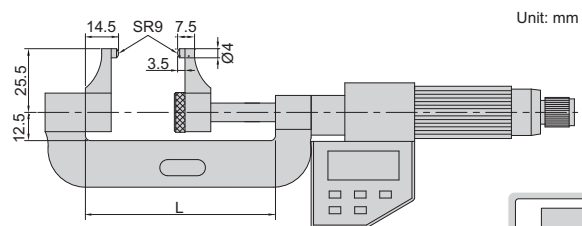

- Resolution: 0.001mm/0.00005"
- Non-rotating spindle
- Buttons: on/off, data set, mm/in, ABS/INC
- Data output
- LR44 battery, automatic power off
- Ratchet friction thimble
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm/0-1")
- Optional accessory: data output cable (code 7315-, 7302-, 7305-)

