

UNIVERSAL CALIPER (NON-WATERPROOF) CODE 1125-600

DATA
OUTPUT

working with stands

working with measuring jaws




1125-600

- Buttons: on/off, set, mm/inch, ABS, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable (code 7315-, 7302-, 7305-)





VIDEO




Code	Range*	Resolution	Accuracy
1125-600	0-600mm/0-24"	0.01mm/0.0005"	±0.05mm

*The range changes according to different points

Half disk points (included)





Measuring external groove diameter with flat measuring face (depth $h_1 \leq 2.5\text{mm}$)



Measuring internal groove diameter with spherical measuring face (depth $h_2 \leq 7.5\text{mm}$)



Conical points (optional)



Measuring center distance

Code
1125-T101


Round shoulder points (optional)



Measure inside diameter of shallow hole

Code
1125-T102



Flat shoulder points (optional)




Measure outside diameter of low boss

Code
1125-T103


Spherical points (included)



Point sleeve (optional)





Code
1125-T104





Working with multifunctional points, ball points and screw thread points



Stands (included)



Depth stop (included)



Measuring jaws (included)



Multifunctional points 7392* (optional, next page)



Ball points 7391* (optional, next page)



Screw thread points 7381*, 7321* (optional, next page)



*It is necessary to use point sleeve (code 1526-T101) for these points

DIGITAL CALIPER WITH INTERCHANGEABLE POINTS (NON-WATERPROOF) CODE 1526-200

short spherical points (included) Unit: mm



long spherical/flat points (included) Unit: mm





spherical blade points (included) Unit: mm



- Supplied with 3 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: points, data output cable (code 7315-, 7302-, 7305-)



1526-200

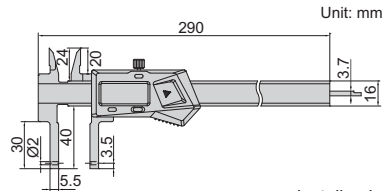


DATA
OUTPUT



VIDEO


measure internal and external grooves

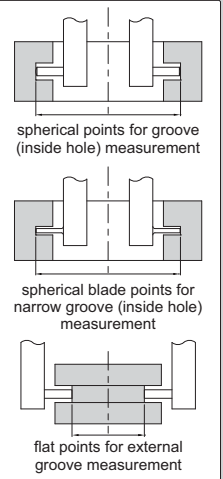

zero setting block for external measurement (included)




Depth stop (optional)

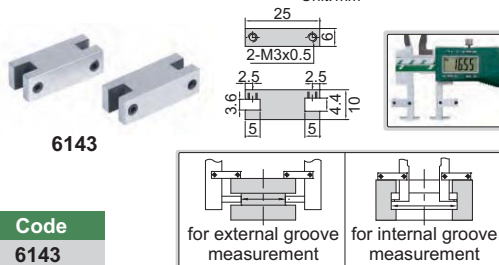


6143

Code

6143




Point sleeve (optional)

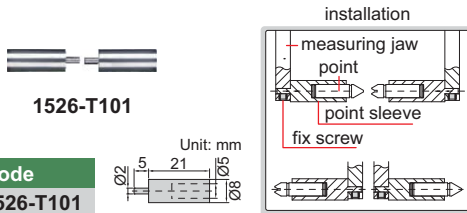

1526-T101

Code

1526-T101




Ball points (optional)

Code	Ball dia.(D)
7391-T3 *	SØ2.0mm
7391-T4 *	SØ2.5mm
7391-T5 *	SØ3.0mm
7391-T6 *	SØ3.5mm
7391-T7 *	SØ4.0mm
7391-T8 *	SØ4.5mm
7391-T9 *	SØ5.0mm
7391-T10 *	SØ6.0mm

7391-T5



Multifunctional points (optional)

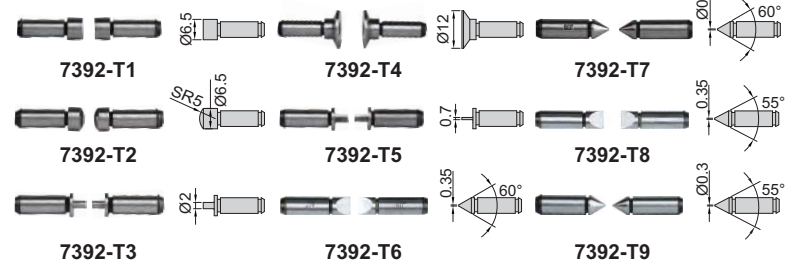

Code	Type	Code	Type	Code	Type
7392-T1 *	flat	7392-T4 *	disk	7392-T7 *	point
7392-T2 *	spherical	7392-T5 *	blade	7392-T8 *	knife-edge
7392-T3 *	spline	7392-T6 *	knife-edge	7392-T9 *	point

* It is necessary to use point sleeve (code 1526-T101) for these points

Screw thread points (optional)



7321-T16

7381-T11

Internal thread (60° thread angle)

Code	Pitch
7321-T11 *	0.4-0.5mm/64-48TPI
7321-T12 *	0.6-0.9mm/44-28TPI
7321-T13 *	1-1.75mm/24-14TPI
7321-T14 *	2-3mm/13-9TPI
7321-T15 *	3.5-5mm/8-5TPI
7321-T16 *	5.5-7mm/4.5-3.5TPI
7321-T1S *	6 pairs/set, including all above points

External thread (60° thread angle)

Code	Pitch
7381-T11 *	0.4-0.5mm/64-48TPI
7381-T12 *	0.6-0.9mm/44-28TPI
7381-T13 *	1-1.75mm/24-14TPI
7381-T14 *	2-3mm/13-9TPI
7381-T15 *	3.5-5mm/8-5TPI
7381-T16 *	5.5-7mm/4.5-3.5TPI
7381-TS *	6 pairs/set, including all above points

* It is necessary to use point sleeve (code 1526-T101) for these points