




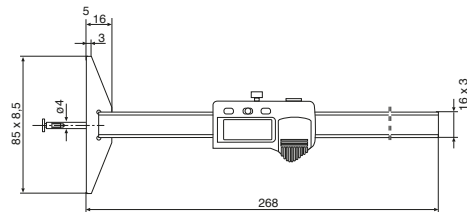

## 1376 DIGI-MET® Depth gauge



### Example of use



### Model

- Stainless steel
- Protection class IP67
- LCD display 7.5 mm
- Locking screw
- Factory standard

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- Reversal of counting direction

- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case
- Disc type insert Ø 7.5 x 1 mm
- Inserts Ø 4 mm, flat and spherical

Icon	Measuring range		Length of beam	Reading		Error limit	Order no.	List price
	mm	inch	mm	mm	inch	mm		EUR
	0 - 100	0 - 4	85	0.01	.0005	0.02	1376 514	517.00



### Accessories

	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Disc type measuring insert Ø 7.5 x 0.5 mm	1276 590	33.00
Disc type measuring insert Ø 7.5 x 1 mm	1276 591	18.80
Flat measuring insert Ø 4 mm	1276 592	18.00
Spherical measuring insert Ø 4 mm	1276 593	25.00
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to USB	1998 720	72.00