




1320 DIGI-MET® Pocket calipers



1320 416

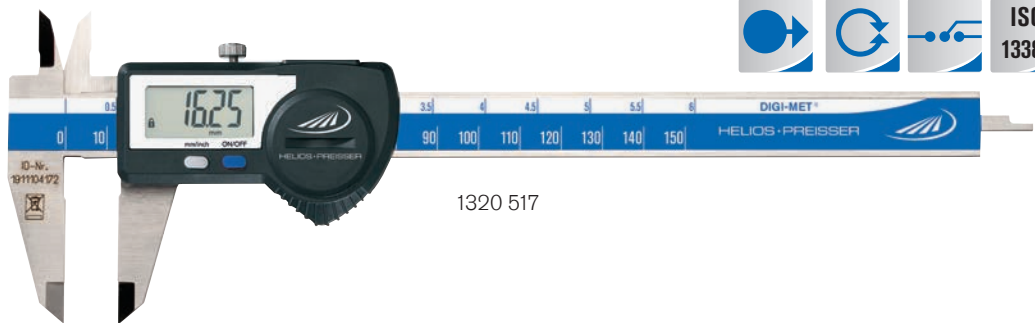

1320 517



Model

- Inductive measuring system, resistant to moisture and sweat
- Stainless steel
- LCD display 11 mm without data output, 7.5 mm with data output
- ISO 13385
- Locking screw
- Inside cross points

- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value 1320 4xx only)
- Variable data output RS 232 + Digimatic + USB (1320 5xx only)

Delivery

- Plastic case

↔	📏	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price
		mm	inch	mm	inch	mm	inch				
Without data output											
▪		0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 416	130.00
▪		0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1320 417	130.00
With DATA VARIABLE											
▪		0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 516	164.00
▪		0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1320 517	164.00
▪		0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1320 519	209.00
▪		0 - 300	0 - 12	65	2.5	0.01	.0005	0.04	none	1320 522	265.00
With DATA VARIABLE, with extra long cross points (40 mm)											
▪		0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 518	446.00

More information on 1320 518 on page 39



1998720

1998501

1997501

Accessories

- Data cable DATA VARIABLE to digimatic
- Data cable DATA VARIABLE to RS232
- Data cable DATA VARIABLE to USB

Order no.

List price

- 1998 501
- 1997 501
- 1998 720

- 73.00
- 57.00
- 82.00