

Partner for specialist retailers

Promotion Brochure Spring 2017

HELIOS · PREISSER



DIGI-MET® Universal calipers 🚕 📆 😏 🔾







Included:

- plate shaped Ø 10.0 mm
- cylindrical Ø 1.5 mm
- conical Ø 3.5 mm / 0.5 mm
- spherical Ø 7.0 mm
- spherical Ø 10.0 mm
- ball inserts Ø 4.5 mm



0710165









Promotion Price Measuring range Jaw length Reading Ref. No inch mm inch mm inch **Euro** mm .0005 601216002 300 12 90 3.5 0.01 561.00 100 4.0 0.01 .0005 601216003 719.00













Universal caliper "Pocket - Talent" 🚕 🗝 🔾

Locking screw

IP67

For internal and

LCD display: 7.5 mm

external measurements



QuickLock Function

mm/inch conversion

PRESET Function (setting a numerical value)

Zero setting at any position

Additional Extras Variable data output RS 232 + Digimatic + USB

The all-round talent that can be used for internal and external measurements. It can be combined with all common types of measuring inserts for indicators with a standard M 2.5 thread. Therefore, the small universal caliper from HELIOS • PREISSER offers you virtually unlimited measurement applications.





0710161*

50,00

page 132

*Standard shipment

accurate setting standard

6 cm length **Original Multifunctional** Swiss Pocketknife Included inside caliper case

measuring inserts with thread M 2.5

Shipment in wooden case, incl.

setting standard and 2 pairs of

More inserts see catalogue

measuring inserts

Measuri	Measuring range		Jaw length		Reading		Catalogue Price	Promotion Price
mm	inch	mm	inch	mm	inch		Euro	Euro
150	6	40	1.57	0.01	.0005	601217001	339.00	299.00
















Pocket vernier caliper DUO - FIX

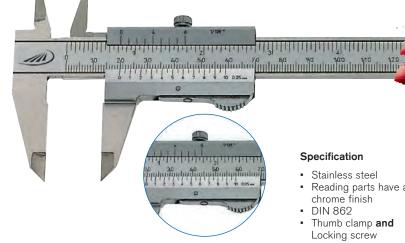

PROMOTION PRICE € 19.50

- Locking screw
- + Thumb clamp
- = DUO FIX

Specification

- Stainless steel
- Reading parts have a satin chrome finish
- DIN 862
- Thumb clamp and Locking screw
- Inside cross points
- Low-set master scale
- Four way measurement
- Includes thread table
- Shipment in imitation leather case

Measuri	Measuring range		Jaw length		Reading		Ref. No	Catalogue Price	Promotion Price
mm	inch	mm	inch	mm	inch			Euro	Euro
150	6	40	1.57	0.05	1/128	rectangular	0190 501	24.30	19.50

DIGI-MET® Pocket calipers Graph Graph Control of the Control of











10

Specification

90

• Inductive measuring system, resistant to damp and sweat

110

Stainless steel

100

- LCD display: 11 mm
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement
- Shipment in plastic case

- ON/OFF switch
- QuickStart Electronic
- $\mathbf{Q} \text{uick} \mathbf{L} \text{ock Function}$
- Zero setting at any position
- mm/inch conversion
- PRESET Function (setting a numerical value)

Measuri	ng range	Jaw I	ength	Rea	ding	Depth gauge	Ref. No	Catalogue Price	Promotion Price
mm	inch	mm	inch	mm	inch			Euro	Euro
150	6	40	1.57	0.01	.0005	Ø 1.5 mm	1320 416	105.00	82.50
150	6	40	1.57	0.01	.0005	rectangular	1320 417	105.00	82.50













DIGI-MET® Pocket caliper C • SEZ





Large display



PROMOTION! € 119.- INCLUDING DEPTH ATTACHMENT BASE OR SWISS POCKETKNIFE

Specification

- LCD display: 11 mm
- DIN 862
- IP67
- · Shipment in plastic case

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- PRESET Function (setting a numerical value)









Measu	ring range	Jaw I	ength	Rea	ding	Depth gauge	Ref. No	Set	Catalogue Price	Promotion Price
mm	inch	mm	inch	mm	inch				Euro	Euro
150	6	40	1.57	0.01	.0005	Ø 1.5 mm	601217002	with pocketknife	152.00	119.00
150	6	40	1.57	0.01	.0005	rectangular	601217003	with pocketknife	152.00	119.00
150	6	40	1.57	0.01	.0005	Ø 1.5 mm	601216012	with depth attachment base	152.00	119.00
150	6	40	1.57	0.01	.0005	rectangular	601216013	with depth attachment base	152.00	119.00



DIGI-MET® Workshop calipers IP65 🙈 🕳 🔾 🗪 🐯











Specification

- Stainless steel
- Inductive measuring system, \bullet **Q**uick**S**tart Electronic protection class IP65
- DIN 862
- LCD display 10 mm for 300 mm, 12.5 mm from 500 mm
- Locking screw
- Shipment in wooden case

- ON/OFF switch

- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output
- RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)





Measuri	ng range	Jaw I	ength	Rea	ding	Stepped jaws	Ref. No	Catalogue Price	Promotion Price	Ref. No	Catalogue Price	Promotion Price
mm	inch	mm	inch	mm	inch	mm		Euro	Euro		Euro	Euro
300	12	90	3.5	0,01	.0005	10	1340 522	398.00	325.00	1342 522	366.00	299.00
500	20	125	5.0	0,01	.0005	20	1340 528	759.00	625.00	1342 528	676.00	555.00
800	31	150	6.0	0,01	.0005	20	1340 532	1,025.00	845.00	1342 532	935.00	770.00
1000	39	150	6.0	0,01	.0005	20	1340 534	1,261.00	1,040.00	1342 534	1,163.00	960.00







Specification

- Stainless steel
- DIN 862
- IP67
- Inside cross points
- Shipment in plastic case

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- · Variable data output







Measur	ing range	Jaw I	ength	Rea	ding	Depth gauge	Ref. No	Set	Catalogue Price	Promotion Price
mm	inch	mm	inch	mm	inch				Euro	Euro
150	6	40	1.57	0.01	.0005	Ø 1.5 mm	601217004	with pocketknife	152.00	119.00
150	6	40	1.57	0.01	.0005	rectangular	601217005	with pocketknife	152.00	119.00
150	6	40	1.57	0.01	.0005	Ø 1.5 mm	601217006	with depth attachment base	152.00	119.00
150	6	40	1.57	0.01	.0005	rectangular	601217007	with depth attachment base	152.00	119.00












External micrometers with interchangeable inserts



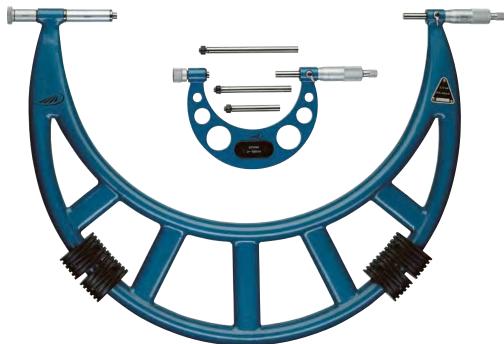

- Reading: 0.01 mm
- Reading parts are satin chrome finished
- Locking lever
- Ratchet stop
- Carbide measuring faces
- Thermally insulated
- Coated malleable cast iron frame* or coated light alloy frame with interchangeable anvil parts
- Includes a setting gauge
- Shipment in wooden case

n Price	Promotion Pr	Catalogue Price	Ref. No	Pitch	Thimble dia.	Spindle dia.	ange	uring	Meas
ro	Euro	Euro		mm	mm	mm		mm	
.00	155.00	190.00	0819 502*	0.5	20	8	150	-	0
.00	173.00	210.00	0819 503*	0.5	20	8	200	-	100
.00	198.00	240.00	0819 505*	0.5	20	8	350	-	150
.00	189.00	230.00	0819 510*	0.5	20	8	300	-	200
.00	239.00	290.00	0819 511	0.5	24	8	400	-	300
.00	272.00	330.00	0819 512	0.5	24	8	500	-	400
.00	313.00	380.00	0819 513	0.5	24	8	600	-	500
.00	389.00	470.00	0819 514	0.5	24	8	700	-	600
2	272 313	330.00 380.00	0819 512 0819 513	0.5 0.5	24 24	8	500 600	-	400 500



Digital micrometers





Specification

- DIN 863-1
- Reading: 0.001 mm/ .00005 inch
- LCD-display 7.5 mm
- Locking lever
- Rapid drive
- Carbide measuring faces
- Thermally insulated
- Shipment in plastic case

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any positionmm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)
- From measuring range 25 50 mm upwards includes a setting gauge

		-	Measuri	ng rang	e			Spindle dia.	Pitch	Ref. No	Catalogue Price	Promotion Price
	r	mm			İ	ıch		mm	mm		Euro	Euro
(0	-	25	0	1	-	1	6.5	0.635	1865 510	181.00	149.00
25	5	-	50	1		-	2	6.5	0.635	1865 513	234.00	193.00
50	0	-	75	2	!	-	3	6.5	0.635	1865 517	321.00	265.00
75	5	-	100	3	}	-	4	6.5	0.635	1865 520	370.00	305.00

Precision dial micrometers



- DIN 863-3
- Reading: 0.01 mm
- Reading on the dial: 1 μm
- Reading parts are satin chrome finished
- Retraction stroke 1.2 mm
- Locking lever
- Carbide measuring faces
- Constant measuring force
- Thermally insulated
- Spindle made of hardened stainless steel
- Adjustable tolerance markers
- Incl. dial comparator gauge, reading 0.001 mm
- Shipment in wooden case



Meas	uring	range	Spindle dia.	Thimble dia.	Pitch	Ref. No	Catalogue Price	Promotion Price
	mm		mm	mm	mm		Euro	Euro
0	-	25	7.5	17.5	0.5	0850 511	538.00	495.00
25	-	50	7.5	17.5	0.5	0850 512	597.00	549.00
50	-	100	7.5	17.5	0.5	0850 514	634.00	583.00
100	-	150	7.5	17.5	0.5	0850 516	678.00	623.00
150	-	200	7.5	17.5	0.5	0850 518	709.00	652.00



Universal comparator gauge UHRTAST

Specification

- Comparator gauge for external and internal measurements. Ideal for testing workpieces and setting machines.
- Versatile for comparative measurements due to the large choice of probes and measuring inserts
- Measuring range can be increased up to 2000 mm by using optional extensions
- The direction of the measuring force is reversible, thus allowing the instrument to be used for both external and internal measurements
- The setting of the universal comparator gauge can be conducted with an adjusting instrument, a master piece, a gauge block combination, a ring gauge or a micrometer
- Measuring range can be extended in conjunction with the extensions
- Shipment in wooden case (excludes a dial gauge)





Watch the video and get to know the applications of this product!



Basic comparator gauge



Internal	External	Ref. No	Catalogue Price	Promotion Price
measurement mm	measurement mm		Euro	Euro
15 - 230	5 - 220	0741 101	1,720.00	1,490.00

Extensions



Length mm	Ref. No	Price Euro		
200	0741 114	254.00		
500	0741 116	388.00		

Pairs of measuring arms



Length	Ref. No	Price
mm		Euro
40	0741 122	249.00
80	0741 124	299.00

Further accessories in our main catalogue from page 151



Pair of depth stop attachment for measuring arms

Ref. No	Price Euro
0741 136	232.00





Pair of probe mounting blocks

Ref. No	Price Euro
0741 170	158.00





Pairs of ball measuring inserts

Length mm	Ref. No	Price Euro
23	0741 178	106.00
53	0741 179	106.00





Pair of shoulder measuring inserts

Ref. No	Price
	Euro
0741 172	189.00



Pair of shoulder measuring inserts

Ref. No	Price Euro
0741 174	154.00





DIGI-MET® Indicator 👌 🔾 💽 🛫



Specification

- Aluminium housing
- Outer ring (bezel) $\overset{\circ}{\varnothing}$ 60 mm
- Replacement probe tip M 2.5
- IP 42
- Clamping shank Ø 8 mm
- Display unit can be rotated through 280°
- LCD display with 8.5 mm high numerals
- Factory standard
- Shipment in cardboard box

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Absolute function (display can be set to zero without losing the Preset value)
- Tolerance function
- MAX-MIN function

- to the item!
- TIR (MAX-MIN) function
- Reversal of counting direction
- Factor input
- Individual buttons can be locked
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)



Measu	ring range	Rea	Reading Accuracy			Ref. No	Price
mm	inch	mm	inch	mm	inch		Euro
25.0	1.0	0.001	.00005	0.005	.0002	1734 506	421.00



Don't compromise, when it comes to exact measurement and examination!

We offer a wide range of premium-quality inspection plates and matching base stands - Made in Germany

 Inspection plates made from special cast iron in two variations (grinded and finely grinded)

 Matching cabinets and base stands with 3-point-bearing fitting Rigid ripped construction Flatness in accordance with 876-2

For more information see our catalogue or visit us at www.helios-preisser.de





DIGI-MET® Height and scribing gauges





- Measuring beam is made from special steel
- LCD-display 11 mm
- Locking screw
- 1) Fine adjustment
- 2 Accurate fine adjustment on rear rack and setting wheel with pinion
- Steel base with dirt grooves
- Scribing possible from base plate level
- Factory standard

Electronic functions

- ON/OFF switch
- Zero setting at any position
- mm/inch conversion
- Data output RS 232 Proximity
- Hold Function
- PRESET Function
- (setting a numerical value) With exchangeable scriber, carbide tipped

Gear rack

Reading Ref. No **Promotion Price** Ref. No **Promotion Price Measuring range** Measuring Base mm beam mm mm mm Euro Euro 145 x 90 x 44 300 30 x 12 0.01 601217008 519.00 601217011 639.00 30 x 12 189 x 118 x 44 0.01 601217009 649.00 601217012 799.00 600 30 x 12 1000 189 x 118 x 44 0.01 601217010 899.00 601217013 1,099.00



2 With exchangeable scriber, carbide tipped

1000



Fine adjustment

Height and scribing gauges

Fine adjustment

Specification

- Measuring beam is made from special steel
- Parallax-free reading
- Locking screw
- ① Fine adjustment
- 2 Accurate fine adjustment on rear rack and setting wheel with pinion
- Steel base with dirt grooves
- Scribing possible from base plate level

Gear rack

- Factory standard
- With exchangeable scriber, carbide tipped

601217019

Measuring range	Measuring	Base	Base Reading		Promotion Price	Ref. No	Promotion Price	
mm	beam mm	mm	mm		Euro		Euro	
300	30 x 12	145 x 90 x 44	0.02	601217014	359.00	601217017	459.00	
600	30 x 12	189 x 118 x 44	0.02	601217015	449.00	601217018	579.00	

601217016


0.02

189 x 118 x 44

30 x 12

619.00

799.00

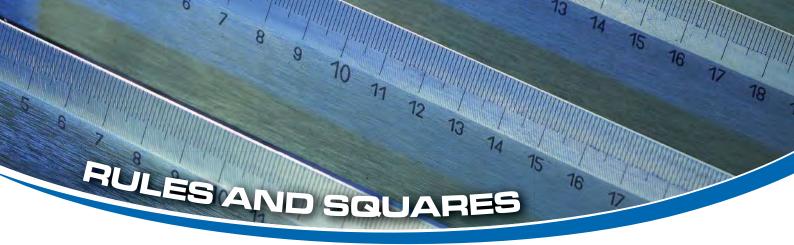

Graduated straight rules type A





Specification

- 10 mm protective ends
- mm graduated scale
- Shipment in cardboard box

Straight rules and scale tapes at PROMOTION PRICE from € 19.50

Special steel

Stainless steel

Length	Cross section	Ref. No	Catalogue Price	Promotion Price	Ref. No	Catalogue Price	Promotion Price
mm	mm		Euro	Euro		Euro	Euro
500	30 x 6	0451 101	23.90	19.50	0451 201	42.30	34.50
1000	40 x 8	0451 102	55.00	45.00	0451 202	97.00	79.00

Graduated straight rules type B





Specification

- Scale begins directly on rules end 1 protective end 10 mm
- mm graduated scale
- Shipment in cardboard box

Special steel **Stainless steel**

Length	Cross section Ref. No		Catalogue Price	atalogue Price Ref. No	
mm	mm		Euro		Euro
500	25 x 5	0452 101	16.00	0452 201	25.00
1000	30 x 6	0452 103	32.00	0452 203	55.00

Steel scale tapes for circumference and diameter

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 18 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 49

- Factory standard
- Spring band steel
- Vernier 0.1 mm
- Main scale graduation 1 mm
- Shipment in cardboard box





for circumference mm			for Ø mm			Ref. No Catalogue Price Euro		Promotion Price Euro
60	-	950	20	-	300	0458 102	35.40	29.00
940	-	2200	300	-	700	0458 103	42.30	34.50
2190	-	3460	700	-	1100	0458 104	55.00	45.00
3450	-	4720	1100	-	1500	0458 105	65.00	53.00





Squares GG1

Specification

- Special steel
- DIN 875
- Accuracy grade 2
- For angle testing in factory and in metal construction
- Shipment in cardboard box

flat

Blac	Blade length		Cross section		Ref. No	Catalogue Price	Ref. No	Catalogue Price	
	mm		mm			Euro		Euro	
75	Х	50	15	Х	5	0372 102	7.30	0373 102	5.20
100	Х	70	20	Х	5	0372 103	8.20	0373 103	6.00
150	Х	100	25	Х	5	0372 104	10.70	0373 104	8.20
200	Х	130	30	Х	6	0372 105	13.70	0373 105	9.90
250	Х	165	35	Х	7	0372 106	18.60	0373 106	13.70
300	Х	175	35	Х	7	0372 107	23.40	0373 107	17.50
400	Х	200	35	Х	7	0372 108	39.30	0373 108	26.40
500	Х	250	40	Х	8	0372 109	52.00	0373 109	38.60
600	Х	300	40	Х	8	0372 110	70.00	0373 110	52.00
750	Х	375	45	Х	10	0372 111	89.00	0373 111	69.00
1000	Х	500	50	X	10	0372 112	122.00	0373 112	101.00

Knife edge squares, hardened



Highest Precision! Accuracy grade 00

- DIN 875
- Accuracy grade 00
- Stainless steel
- For exact angle and flatness testing (for example: tool making)
- Shipment in cardboard box





Blade length			Cross section			Ref. No	Catalogue Price	Promotion Price
mm			mm				Euro	Euro
50	Х	40	14	Х	4	0388 202	22.10	18.00
75	Х	50	15	Х	4	0388 203	26.10	21.50
100	Х	70	20	Х	5	0388 204	31.40	25.00
150	Х	100	25	Х	6	0388 205	40.50	33.00
200	Х	130	30	Х	7	0388 206	60.00	49.50
300	X	200	40	X	8	0388 208	131.00	108.00





- All illustrations and descriptions are valid at the time of going to press.
- All mentioned prices exclude the statutory value added tax (V.A.T.)
- No part of this promotion may be reproduced and/or duplicated, stored in a retrieval system, transmitted in any form or by means of electronic, mechanical, recording or otherwise, without the expressed prior written permission of HELIOS PREISSER.