




## 1326i DIGI-MET® Pocket calipers IP67 with integrated wireless

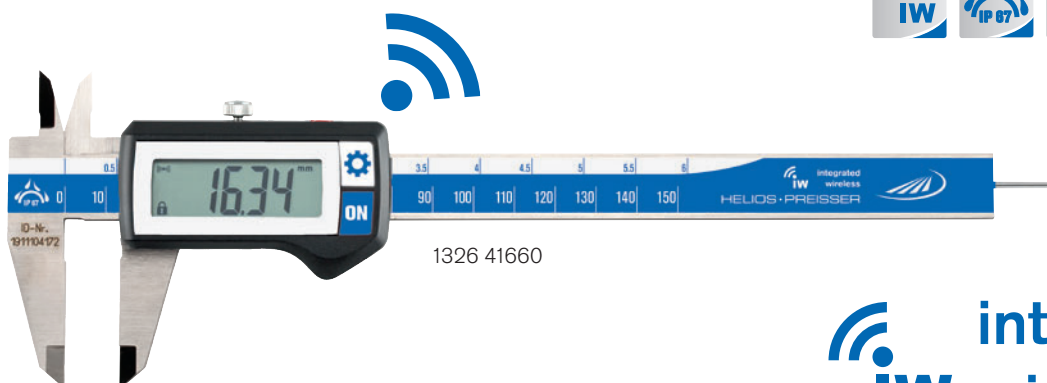

1326 41660

## integrated IW wireless

Wireless Data Transmission

### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 11 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurements

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Integrated Wireless

### Delivery

- Plastic case



More information on our i-series and Integrated Wireless on page

Marked *	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price
	mm	inch	mm	inch	mm	inch				
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 41660	218.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1326 41760	218.00
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1326 41860	279.00
▪	0 - 300	0 - 12	65	2.5	0.01	.0005	0.03	none	1326 42260	337.00



1998780

### Accessories

Battery, 3V-Lithium, CR 2032

i-Stick USB-receiver for Integrated Wireless

Order no.

0220 704

1998 780

List price

EUR

3.90

95.00

Integrated Wireless is intended to be sold within the European Economic Area only



## 1320 DIGI-MET® Pocket calipers



1320 416



1320 517



### Model

- Inductive measuring system, resistant to moisture and sweat
- Stainless steel
- LCD display 11 mm without data output, 7.5 mm with data output
- DIN 862
- Locking screw
- Inside cross points

- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- **PRESET-Function** (setting a numerical value)

### Delivery

- Plastic case



Video electronic

▶	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price EUR
	mm	inch	mm	inch	mm	inch				
<b>Without data output</b>										
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 416	110.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1320 417	110.00
<b>With DATA VARIABLE</b>										
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 516	145.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1320 517	145.00
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1320 519	185.00
▪	0 - 300	0 - 12	65	2.5	0.01	.0005	0.03	none	1320 522	235.00
<b>With DATA VARIABLE, with extra long cross points (40 mm)</b>										
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 518	395.00

More information on 1320 518 on page 58



1998720

1998501

1997501

### Accessories


	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to USB	1998 720	72.00



## 1326 DIGI-MET® Pocket calipers IP67



DIN  
862

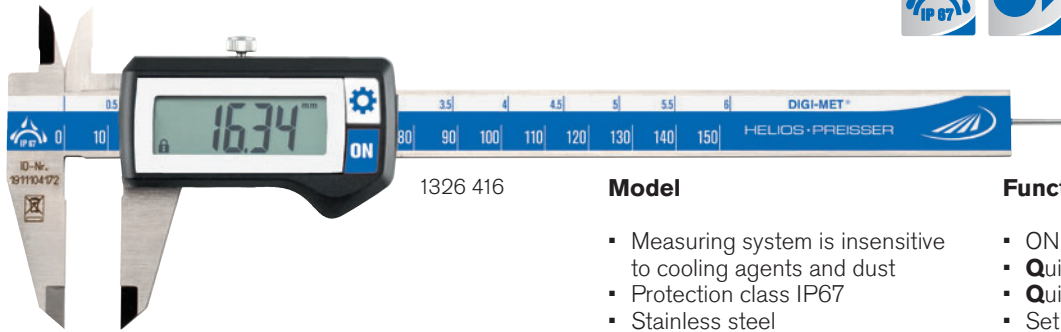

1326 416

### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 11 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)

### Delivery

- Plastic case



Video  
electronic

	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price EUR
	mm	inch	mm	inch	mm	inch				
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 416	159.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1326 417	159.00
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1326 418	225.00
▪	0 - 300	0 - 12	65	2.5	0.01	.0005	0.03	none	1326 422	285.00

### With carbide-tipped measuring jaws

▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 914	343.00
---	---------	-------	----	-----	------	-------	------	-----------	----------	--------

### Accessories

Battery, 3V-Lithium, CR 2032

### Order no.


0220 704

### List price

EUR

3.90

## 0220 Additional depth measuring base



### Model


- Stainless steel
- Bridge length: 75 mm
- Dimensions: 75 x 6.5 mm

	Order no.	List price EUR
▪	0220 705	22.40



# HELIOS · PREISSER

## 1326 DIGI-MET® Pocket calipers IP67 with data output

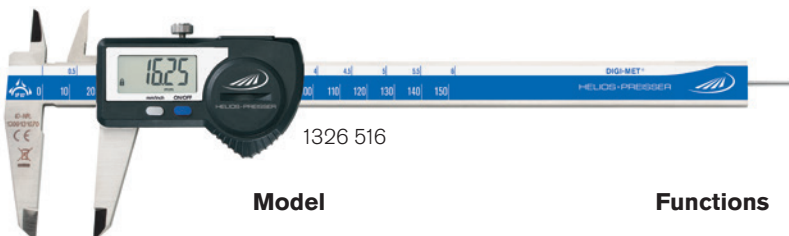

1326 516



### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Plastic case

▣	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm			EUR
▣	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 516	159.00
▣	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1326 517	159.00
▣	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1326 518	235.00



### Accessories

	Order no.	List price
		EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to USB	1998 720	72.00

## 1322 DIGI-MET® Pocket caliper PRISMA



### Model

- Double prisma guide with excellent sliding characteristics
- Protection class IP67
- Stainless steel
- DIN 862
- LCD display 7.5 mm
- Locking screw
- Inside cross points
- Four way measurement


### Functions

- ON / OFF
- Set to zero at any point
- mm / inch switching
- Quick-Start**
- Quick-Lock** (key lock)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

▣	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm			EUR
▣	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1322 516	212.00



= QuickLock



= QuickStart



= Waterproof acc. IP



= Data output



= DIN



## 1330 / 1331 DIGI-MET® Workshop calipers



### Model

- Stainless steel
- Inductive measuring system, resistant to damp and sweat
- DIN 862
- Knife points
- LCD display:
  - 10 mm with measuring range 300 mm;
  - 12.5 mm from measuring range 500 mm
- Locking screw

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

☒	🇩🇪	Measuring range		Jaw length		Reading		Stepped jaws mm	Error limit mm	Order no.	List price EUR
		mm	inch	mm	inch	mm	inch				
<b>With knife points, without fine adjustment</b>											
▪		0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1330 522	398.00
▪		0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1330 528	607.00
▪		0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1330 532	992.00
▪		0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1330 534	1200.00
<b>With knife points, with fine adjustment</b>											
▪		0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1331 522	462.00
▪		0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1331 528	681.00
▪		0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1331 532	1049.00
▪		0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1331 534	1206.00

### Accessories



1998720

1997501

1998501

Battery, 3V-Lithium, CR 2032

Data cable DATA VARIABLE to USB

Data cable DATA VARIABLE to RS232

Data cable DATA VARIABLE to Digimatic

### Order no.

0220 704

1998 720

1997 501

1998 501

### List price EUR

3.90

72.00

50.00

64.00



## 1334 / 1335 DIGI-MET® Workshop calipers



1

### Model

- Stainless steel
- Inductive measuring system, resistant to damp and sweat
- DIN 862
- LCD display:
  - 10 mm with measuring range 300 mm;
  - 12.5 mm from measuring range 500 mm
- Locking screw

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

Icon	Measuring range		Jaw length		Reading		Stepped jaws	Error limit	Order no.	List price
	mm	inch	mm	inch	mm	inch				
<b>Without fine adjustment</b>										
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1334 522	369.00
▪	0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1334 528	518.00
▪	0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1334 532	905.00
▪	0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1334 534	1071.00
<b>With fine adjustment</b>										
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1335 522	422.00
▪	0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1335 528	596.00
▪	0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1335 532	973.00
▪	0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1335 534	1118.00



### Accessories

	Order no.	List price
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to USB	1998 720	72.00
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to Digimatic	1998 501	64.00



## 1340 / 1341 DIGI-MET® Workshop calipers IP65



### Model

- Stainless steel
- Inductive measuring system, protection class IP65
- DIN 862
- Knife points
- LCD display:
  - 10 mm with measuring range 300 mm;
  - 12.5 mm from measuring range 500 mm
- Locking screw

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

Marked	Measuring range		Jaw length		Reading		Stepped jaws	Error limit	Order no.	List price EUR
	mm	inch	mm	inch	mm	inch				
<b>With knife points, without fine adjustment</b>										
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1340 522	431.00
▪	0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1340 528	822.00
▪	0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1340 532	1110.00
▪	0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1340 534	1365.00
<b>With knife points, with fine adjustment</b>										
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1341 522	488.00
▪	0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1341 528	878.00
▪	0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1341 532	1165.00
▪	0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1341 534	1420.00



1998720

1997501

1998501

### Accessories

- Battery, 3V-Lithium, CR 2032
- Data cable DATA VARIABLE to USB
- Data cable DATA VARIABLE to RS232
- Data cable DATA VARIABLE to digimatic

### Order no.

### List price EUR

0220 704

3.90

1998 720

72.00

1997 501

50.00

1998 501

64.00





# HELIOS · PREISSER

## 1342 / 1343 DIGI-MET® Workshop calipers IP65



1



### Model

- Stainless steel
- Inductive measuring system, protection class IP65
- DIN 862
- LCD display:
  - 10 mm with measuring range 300 mm;
  - 12.5 mm from measuring range 500 mm
- Locking screw

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

Icon	Measuring range		Jaw length		Reading		Stepped jaws	Error limit	Order no.	List price
	mm	inch	mm	inch	mm	inch				
<b>Without fine adjustment</b>										
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1342 522	396.00
▪	0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1342 528	731.00
▪	0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1342 532	1012.00
▪	0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1342 534	1259.00
<b>With fine adjustment</b>										
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1343 522	452.00
▪	0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1343 528	788.00
▪	0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1343 532	1068.00
▪	0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1343 534	1314.00




### Accessories

	Order no.	List price
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to USB	1998 720	72.00
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00





## 0222 / 0223 DIGI-MET® Workshop calipers long version

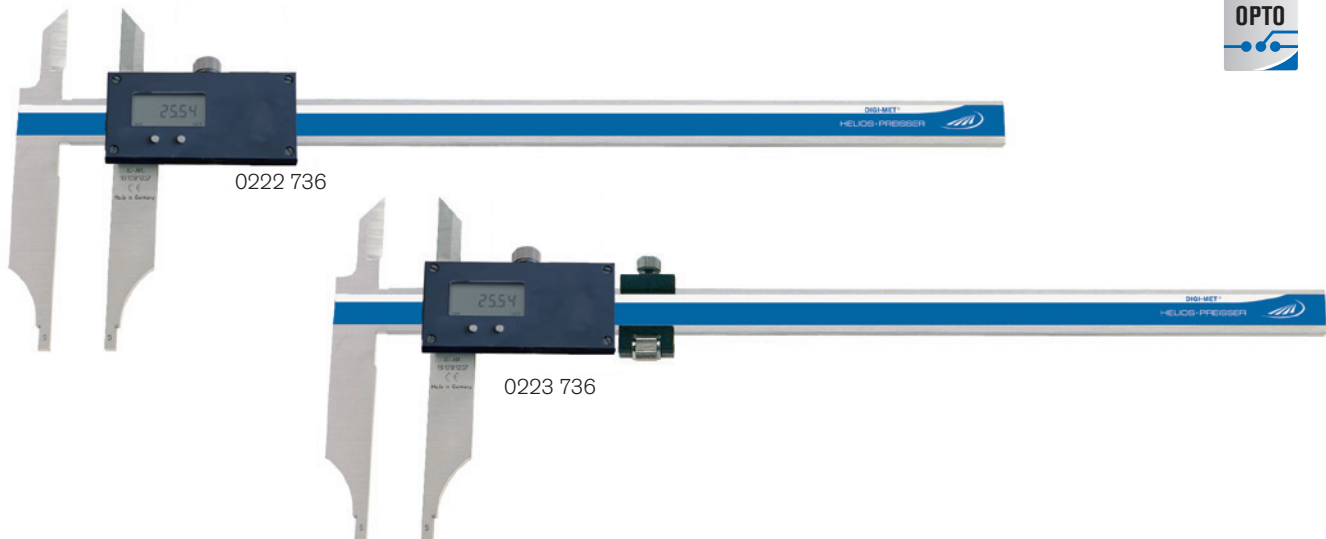

### Model

- Stainless steel
- LCD display 10 mm
- Locking screw
- Knife points
- Factory standard

### Functions

- ON / OFF
- Set to zero at any point
- mm / inch switching
- Hold
- Data output Opto RS 232
- PRESET-Function (setting a numerical value)

### Delivery

- Wooden case

▶◀	🏠	Measuring range		Jaw length		Reading		Error limit	Order no.	List price
		mm	inch	mm	inch	mm	inch	mm		EUR
<b>With knife points, without fine adjustment</b>										
	▪	0 - 1500	0 - 59	200	8.0	0.01	.0005	0.1	0222 734	2677.00
	▪	0 - 2000	0 - 79	200	8.0	0.01	.0005	0.12	0222 736	3212.00
<b>With knife points, with fine adjustment</b>										
	▪	0 - 1500	0 - 59	200	8.0	0.01	.0005	0.1	0223 734	2856.00
	▪	0 - 2000	0 - 79	200	8.0	0.01	.0005	0.12	0223 736	3309.00



### Accessories


	Order no.	List price
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable opto to RS232	0996 701	77.00
Data cable opto to USB	0996 705	147.00
USB-keyboard interface cable	0997 770	251.00



## 0224 / 0225 DIGI-MET® Workshop calipers long version



1

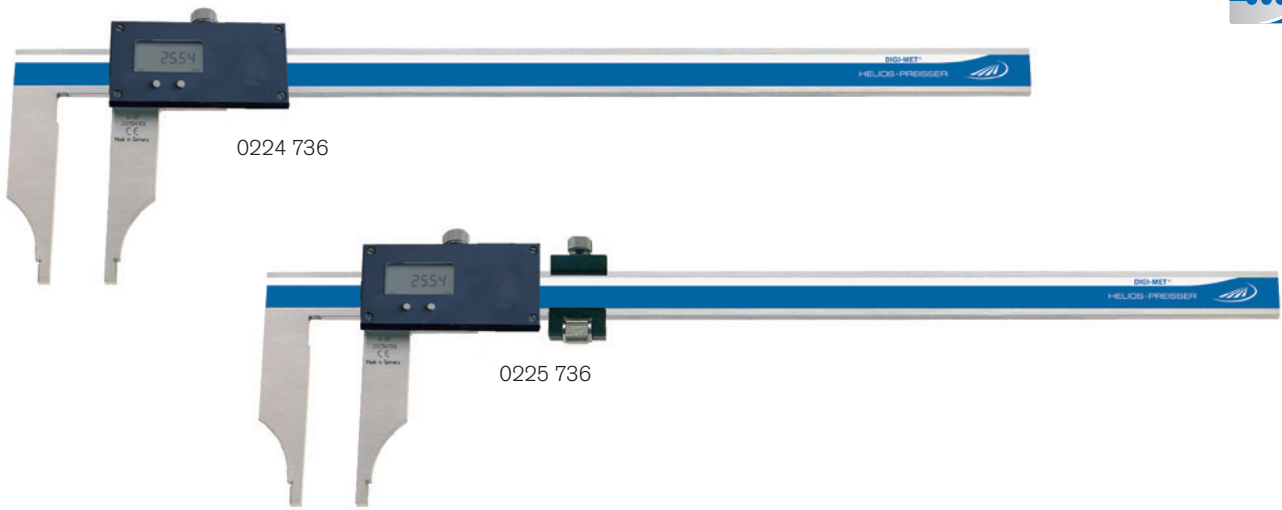

### Model

- Stainless steel
- LCD display 10 mm
- Locking screw
- Without knife points
- Factory standard

### Functions

- ON / OFF
- Set to zero at any point
- mm / inch switching
- Hold
- Data output Opto RS 232
- PRESET-Function (setting a numerical value)

### Delivery

- Wooden case

Icon	Measuring range		Jaw length		Reading		Error limit	Order no.	List price EUR
	mm	inch	mm	inch	mm	inch	mm		
<b>Without fine adjustment</b>									
▪	0 - 1500	0 - 59	200	8.0	0.01	.0005	0.1	0224 734	2421.00
▪	0 - 2000	0 - 79	200	8.0	0.01	.0005	0.12	0224 736	2934.00
<b>With fine adjustment</b>									
▪	0 - 1500	0 - 59	200	8.0	0.01	.0005	0.1	0225 734	2552.00
▪	0 - 2000	0 - 79	200	8.0	0.01	.0005	0.12	0225 736	3029.00



### Accessories


	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable opto to RS232	0996 701	77.00
Data cable opto to USB	0996 705	147.00
USB-keyboard interface cable	0997 770	251.00



## 1351 DIGI-MET® Workshop calipers with cross points



1351 522

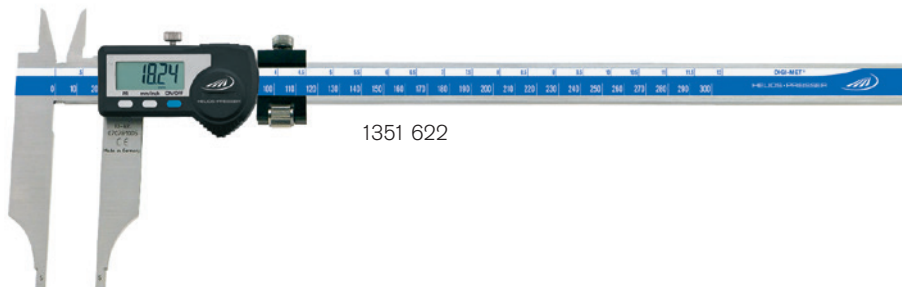

1351 622

### Model

- Stainless steel
- DIN 862
- Protection class IP65
- LCD display
- 10 mm with measuring range 300 mm;
- 12.5 mm from measuring range 500 mm
- Locking screw
- Inside cross points
- Three way measurement

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

Measuring range	Jaw length		Reading		Error limit	Order no.	List price EUR	
	mm	inch	mm	inch				
<b>Without fine adjustment</b>								
0 - 300	0 - 12	90	3.5	0.01	.0005	0.03	1351 522	554.00
0 - 500	0 - 20	125	5.0	0.01	.0005	0.03	1351 528	717.00
<b>With fine adjustment</b>								
0 - 300	0 - 12	90	3.5	0.01	.0005	0.03	1351 622	591.00
0 - 500	0 - 20	125	5.0	0.01	.0005	0.03	1351 628	784.00



1998720

1997501

1998501

### Accessories



	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to USB	1998 720	72.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to RS232	1997 501	50.00



## 1338 DIGI-MET® Workshop caliper PRISMA



1

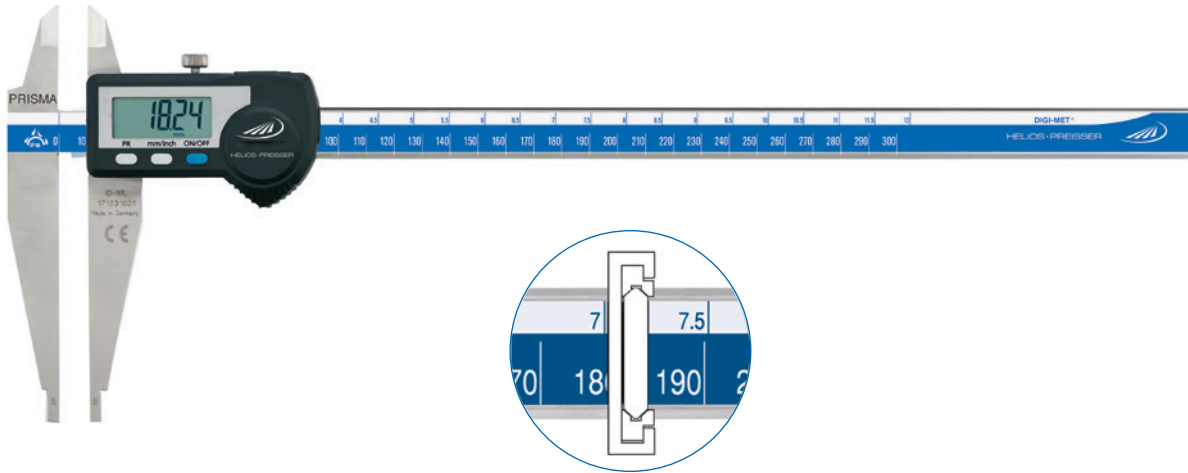

### Model

- Double prisma guide with excellent sliding characteristics
- Stainless steel
- Accuracy in accordance to DIN 862
- Protection class IP65
- LCD display 10 mm
- Locking screw
- Knife points
- Stepped jaws for inside measurement 10 mm

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

▣	Measuring range		Jaw length		Reading		Error limit	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm		EUR
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	0.03	1338 522	475.00




### Accessories

	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to USB	1998 720	72.00



## 0228 DIGI-MET® Workshop calipers lightweight

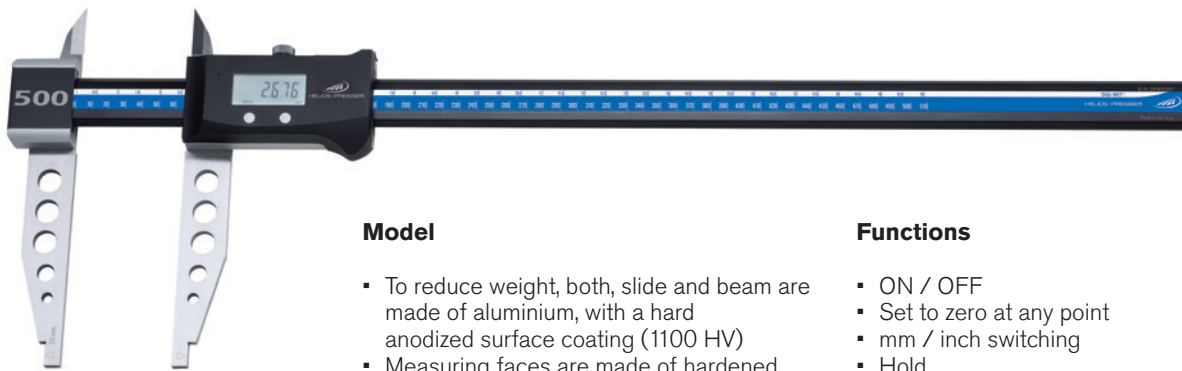

### Model

- To reduce weight, both, slide and beam are made of aluminium, with a hard anodized surface coating (1100 HV)
- Measuring faces are made of hardened stainless steel
- Factory standard
- Smooth movement due to the double V-guide
- LCD display
- Locking screw
- Knife points

### Functions

- ON / OFF
- Set to zero at any point
- mm / inch switching
- Hold
- PRESET-Function (setting a numerical value)


### Delivery

- Wooden case

✕	🏠	Measuring range		Jaw length		Reading		Error limit	Order no.	List price
		mm	inch	mm	inch	mm	inch	mm		EUR
		0 - 300	0 - 12	90	3.5	0.01	.0005	0.03	0228 701	493.00
		0 - 500	0 - 20	150	6.0	0.01	.0005	0.03	0228 702	686.00
		0 - 800	0 - 31	150	6.0	0.01	.0005	0.08	0228 703	964.00
		0 - 1000	0 - 39	150	6.0	0.01	.0005	0.08	0228 704	1137.00
	▪	0 - 1500	0 - 59	150	6.0	0.01	.0005	0.1	0228 724	2869.00
	▪	0 - 2000	0 - 79	150	6.0	0.01	.0005	0.12	0228 726	3410.00

### Accessories

	Order no.	List price
Battery, 3V-Lithium, CR 2032	0220 704	3.90

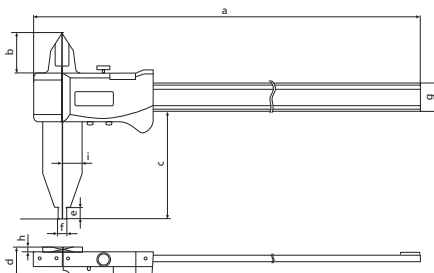

Measuring range	a	b	c	d	e	f	g	h	i
300	450	33	90	24.5	10	10	25.0	4.5	17.0
500	726	42	150	33.5	15	20	31.9	6.0	29.0
800	1026	42	150	33.5	15	20	31.9	6.0	29.0
1000	1226	42	150	33.5	15	20	31.9	6.0	29.0
1500	1726	42	150	33.5	15	20	31.9	6.0	29.0
2000	2226	42	150	33.5	15	20	31.9	6.0	29.0