



0718 Dial thickness gauges



0718 101



0718 112




Model

- Frame is made of aluminium alloy
- Factory standard
- When ordering please specify the gauge form


Delivery

- Cardboard box

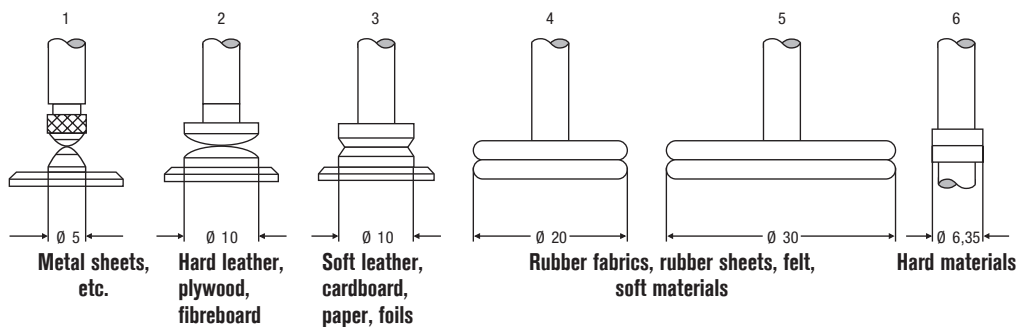

Measuring range mm	Reading mm	Frame depth mm	Probe type	Order no.	List price EUR
0 - 10	0.1	15	1 / 2 / 3 / 6	0718 101	51.00
0 - 20	0.1	50	1 - 5	0718 104	106.00
0 - 30	0.1	50	1 - 5	0718 105	120.00
0 - 50	0.1	50	1 - 5	0718 106	182.00
With a lifting device and stand, range per revolution 10 mm					
0 - 30	0.1	200	1 - 5	0718 108	156.00
0 - 30	0.1	300	1 - 5	0718 109	179.00
0 - 30	0.1	400	1 - 5	0718 110	200.00
With a lifting wheel and concentric pointers, range per revolution 1 mm					
0 - 10	0.01	18	1 / 2 / 3 / 6	0718 112	101.00
0 - 10	0.01	45	1 / 2 / 3 / 6	0718 113	116.00
With a lifting device, range per revolution 1 mm					
0 - 10	0.01	50	1 - 5	0718 115	120.00

0720 Dial thickness gauges

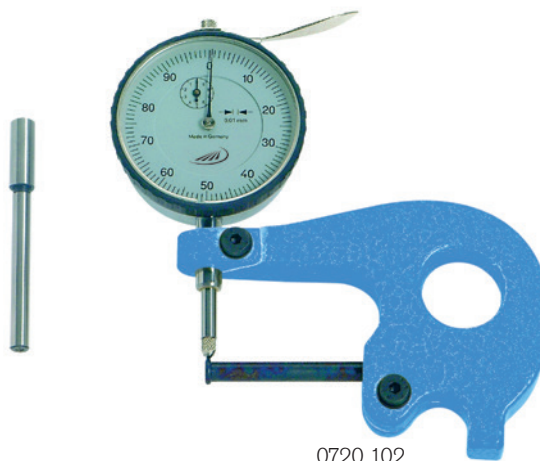

0720 102



0720 103

Model

- With a lifting device
- Factory standard
- Frame is made of alluminium alloy
- Revolution counter

- **Order No. 0720 102**
Tube wall thickness dial gauge with 2 exchangeable probes
- with bund radius = 10 mm, dia. 8 mm
- cylindrical dia. 6 mm
- **Order No. 0720 103**
Foil thickness measuring gauge, measuring insert dia. 6.35 mm, flat, thermally insulated

Delivery

- Cardboard box

Measuring range mm	Reading mm	Range per rev. mm	Throat depth mm	Order no.	List price EUR
Tube wall thickness dial gauge					
0 - 10	0.01	1	50	0720 102	159.00
Foil thickness dial gauge					
0 - 1	0.001	0.2	30	0720 103	227.00