

Dial indicators 0.01 mm

Indicators with an excellent price-performance ratio. The **shockproof** design protects the mechanics against harsh blows and reduces the possibility of damage

- Measuring range: 0 - 10 mm.
- Graduation: 0.01 mm.
- Stem: \varnothing 8 mm.
- Dial diameter: 55 mm.
- Rotatable dial.
- Shockproof.
- Adjustable tolerance markers.
- Flat back.
- Conform factory standard.



Item No.	Measuring range/mm	Price EUR
907.928	0 - 3	
907.929	0 - 5	
907.930	0 - 10	



Dial gauges 0.01 mm

Indicators with an excellent price-performance ratio. The **shockproof** design protects the mechanics against harsh blows and reduces the possibility of damage

- Measuring range: 0 - 10 mm.
- Graduation: 0.01 mm.
- Stem: \varnothing 8 mm.
- Dial diameter: 60 mm.
- Rotatable dial.
- Shockproof.
- Adjustable tolerance markers.
- Locking screw.
- Flat back.
- Conform factory standard.



Item No.	Measuring range/mm	Price EUR
907.931	0 - 3	
907.932	0 - 5	
907.933	0 - 10	



Dial gauges 0.01 mm

Indicators with an excellent price-performance ratio. The **shockproof** design protects the mechanics against harsh blows and reduces the possibility of damage

- Measuring range: 0 - 50 mm.
- Graduation: 0.01 mm.
- Stem: \varnothing 8 mm.
- Dial diameter: 60 mm (907.936: 76 mm).
- Rotatable dial.
- Shockproof.
- Adjustable tolerance markers.
- Locking screw.
- Flat back.
- Conform factory standard.



Item No.	Measuring range/mm	Price EUR
907.934	0 - 25	
907.935	0 - 30	
907.936	0 - 50	

Waterproof dial indicators 0.01 mm

- Measuring range: 0 - 10 mm.
- Graduation: 0.01 mm.
- Stem: \varnothing 8 mm.
- Dial diameter: 55 mm.
- Rotatable dial.
- Shockproof.
- Adjustable tolerance markers.
- Back with lug.
- Protection: IP54.
- Conform factory standard.



Item No.	Measuring range/mm	Price EUR
908.777	0 - 3	
908.778	0 - 5	
908.779	0 - 10	



Miniature dial indicators 0.01 and 0.001 mm

Indicators with very small dimensions and an excellent price-performance ratio. The **shockproof** design protects the mechanics against harsh blows and reduces the possibility of damage.

- Measuring range: 0 - 8 mm.
- Graduation: 0.01 or 0.001 mm.
- Stem: \varnothing 8 mm.
- Dial diameter: 40 mm.
- Rotatable dial.
- Shockproof.
- Adjustable tolerance markers.
- Flat back.
- Conforms to factory standard.



Item No.	Measuring range/mm	Price EUR
Graduation 0.01 mm:		
907.925	0 - 3	
907.926	0 - 5	
907.927	0 - 8	
Graduation 0.001 mm:		
907.920	0 - 1	



Dial indicators 0.001 mm

Indicators with an excellent price-performance ratio. The **shockproof** design protects the mechanics against harsh blows and reduces the possibility of damage.

- Measuring range: 0 - 5 mm.
- Graduation: 0.001 mm.
- Stem: \varnothing 8 mm.
- Dial diameter: 60 mm.
- Scale marking: 0 - 100 - 0.
- Rotatable dial.
- Shockproof.
- Adjustable tolerance markers.
- Locking screw.
- Flat back.
- Conforms to factory standard.



Item No.	Measuring range/mm	Price EUR
907.921	0 - 1	
907.922	0 - 2	
907.923	0 - 3	
907.924	0 - 5	



C05-311-EN-20070727

Precision dial indicators

Highly accurate shockproof dial indicators for measurements from a fixed reference point. Very suitable for internal measuring instruments and dial gauge stands for example.

- Measuring range: 0.1 mm.
- Graduation: 0.001 mm.
- Measuring force: < 2 N.
- Stem: \varnothing 8 mm.
- Travel: 3 mm.
- Adjustable tolerance markers.
- Fine adjustment.
- Conforms to factory standard.




Item No.	Measuring range/mm	Price EUR
907.939	0.1	
907.940*	0.1	

* Equipped with electronic switch (24V, 100mA) for Go/NoGo indication.



907.939




907.940

Käfer Compika precision dial indicators

Accurate precision dial indicators with stable, multiple ball-bearing mechanics. Because of that the Compika has a very low hysteresis. Easy to set by the fine adjustment on top of the dial indicator, that has a protective knob to prevent unintentional displacement of the pointer.

- Measuring range: 0.1 mm.
- Graduation: 0.001 mm.
- Measuring force: approx. 1 N.
- Stem: \varnothing 8 mm.
- Max. probe travel: 3 mm.
- Fine adjustment.
- Adjustable tolerance markers.
- Ball bearing probe rod.
- Protective knob.
- Shockproof.
- Waterproof (only 852.386).
- Stem and measuring pin out of hardened stainless steel.
- DIN 879.
- Delivery in a case incl. lifting cable.

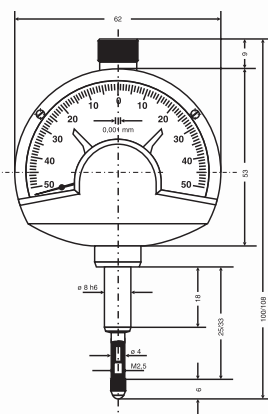

852.360



852.386

Item No.	Measuring range/mm	Waterproof	Dial \varnothing /mm	Scale numbering	Price EUR
852.360	0.1	no	62	50-0-50	
852.386	0.1	yes	62	50-0-50	