

Lever-type digital test indicator

Lever-type digital test indicator with tolerance judgement. Suitable for measurements in both directions. Equipped with three dovetail mountings.

- Measuring range: 1 mm.
- Resolution: 0.01 mm.
- Accuracy: ± 0.02 mm.
- mm/inch conversion.
- LCD display.
- Reset.
- Measuring force: ≤ 0.6 N.
- Insert length: 26 mm.
- Ruby contact point: $\varnothing 2$ mm.
- 230° adjustable measuring insert.
- With dovetail joint and stems $\varnothing 4$ and $\varnothing 8$ mm.
- Adjustable tolerance limits.
- Power supply: 1 battery (V357).



Item No.	Measuring range/mm	Resolution mm	Price EUR
907.574	1	0.01	
Option: 836.535 Spare battery			



Lever-type test indicators

- Measuring range: up to 0.8 mm.
- Graduation: 0.01 or 0.002 mm.
- Dial diameter: 40 mm.
- Rotatable dial.
- Insert: $\varnothing 2$ mm.
- With dovetail joint and stems $\varnothing 6$ and $\varnothing 8$ mm.
- Conforms to factory standard.



Item No.	Measuring range/mm	Graduation mm	Scale numbering	Price EUR
907.941	0.8	0.01	0-0.4-0	
907.942	0.2	0.002	0-50-0	




907.941

C05-302-EN-20070727

Peacock lever-type dial test indicators

- Measuring range: up to 1 mm.
- Graduation: 0.01, 0.002 or 0.001 mm.
- With dovetail joint and stem $\varnothing 8$ mm.
- Tungsten carbide contact point: $\varnothing 2$ mm.
- Probe thread: M1.7.

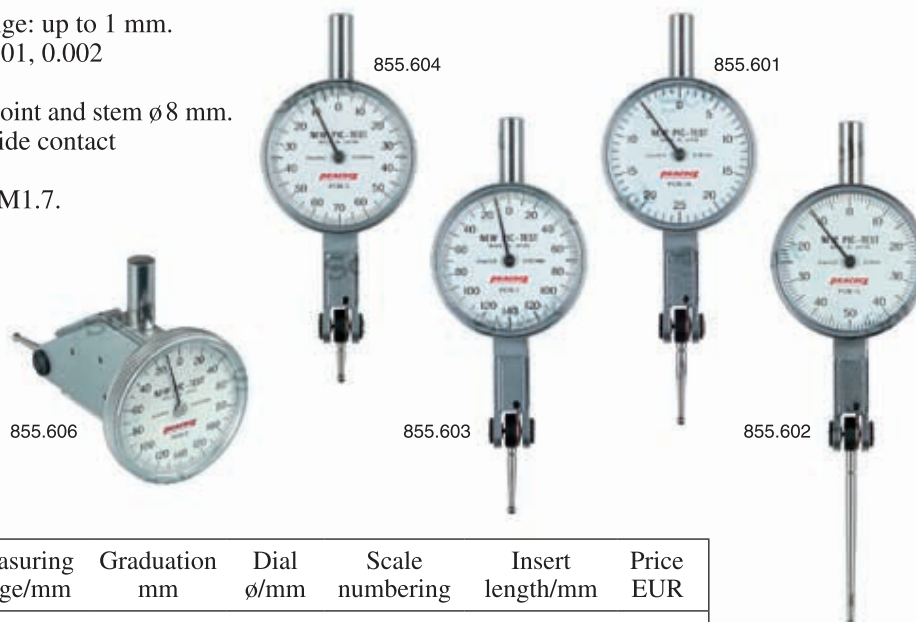

Item No.	Measuring range/mm	Graduation mm	Dial $\varnothing$ /mm	Scale numbering	Insert length/mm	Price EUR
Horizontal:						
855.601	0.5	0.01	35	0-25-0	21.3	
855.602	1	0.01	35	0-50-0	42.8	
855.603	0.28	0.002	35	0-140-0	17.8	
855.604	0.14	0.001	30	0-70-0	11.7	
Perpendicular:						
855.606	0.28	0.002	35	0-140-0	17.8	



Lever-type dial test indicator

- Measuring range: 0.8 mm.
- Graduation: 0.01 mm.
- Measuring force: max. 0.3 N.
- Scale numbering: 0-40-0.
- Measurement direction reversible.
- Hardened steel contact point $\varnothing 2$ mm.
- 180° adjustable measuring insert.
- Dial indicator stem: $\varnothing 5$ or 8 mm.
- Dial indicator dimensions: 70 x 42 x 30 mm.
- Holder stem: $\varnothing 8$ mm.
- Holder dimensions: 80 x 12 x 8 mm.
- Delivery in a case with holder.



Item No.	Measuring range/mm	Graduation mm	Price EUR
858.113	0.8	0.01	

