



DIN 863 T2
(Style E)
NF E 11-090

Vernier reading
to 0,002 mm

Tungsten carbide
tipped

0,5 mm


Max. perm.
error of 3 µm

Identification
number

Declaration
of conformity

ETALON 266 Micrometer Heads

With or without spindle lock.

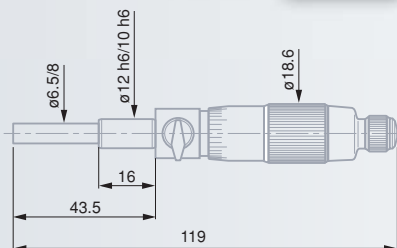

No	mm	D mm	mm	Spindle lock
072115942	0 ÷ 25	Ø 6,5	12h6	—
072115943	0 ÷ 25	Ø 8	12h6	●
072116258	0 ÷ 25	Ø 6,5	10h6	●



DIN 863 T2
(Style T)

0,001 mm
0,00005 in

Metric/Inch
conversion

Non-rotating
spindle

Measuring rods
with hardened steel
ends

3 mm dia.
measuring rods

30 mm

RS 232
data output

0,5 mm

Max. perm. error
(meas. element):
3 µm

Plastic case

Identification
number

Inspection report
with a declaration
of conformity

Depth Micrometers

With interchangeable measuring rods provided in sets. The rods are adjusted in steps, each with a step length of 30 or 25 mm, thus eliminating the need for correcting the display when rods are exchanged.

Models MICROMASTER

Non-rotating measuring rod. Sets with a step length of 30 mm.



No	mm	in	mm
06030069	0 ÷ 90	0 ÷ 3.5	50 x 15
06030070	0 ÷ 180	0 ÷ 7	100 x 15

Optional Accessories

06060020	3 piece rod set	0 ÷ 90 mm
06060021	6 piece rod set	0 ÷ 180 mm

Models ISOMASTER AQ

Measuring rods with a step length of 25 mm or 1 in.



No	mm		No	in	
	mm	mm		in	mm
00211002	0 ÷ 75	50 x 15	00221002	0 ÷ 3	50 x 15
00211003	0 ÷ 150	50 x 15	00221003	0 ÷ 6	50 x 15
00211004	0 ÷ 75	100 x 15	00221004	0 ÷ 3	100 x 15
00211005	0 ÷ 150	100 x 15	00221005	0 ÷ 6	100 x 15



DIN 863 T2
(Style T)
NF E 11-097



0,01 mm
0.0001 in



Measuring rods
with hardened
steel ends



3 mm dia.
measuring rods.
Measuring

face on the base:
see table



0,5 mm



Max. perm. error
of the measuring
element: 3 µm



Plastic case



Identification
number



Declaration
of conformity

